


# Mainsail Cover Dimensions

Name	Phone
Address	Email
Colour Required	Design and Type of Boat

All measurements should be taken with the sail flaked normally over the boom using a flexible measuring tape held loosely around the sail. If you have an existing mainsail cover that fits well, you can use it as a guide for taking measurements. If you're unsure about any measurements, please get in touch with us for assistance.

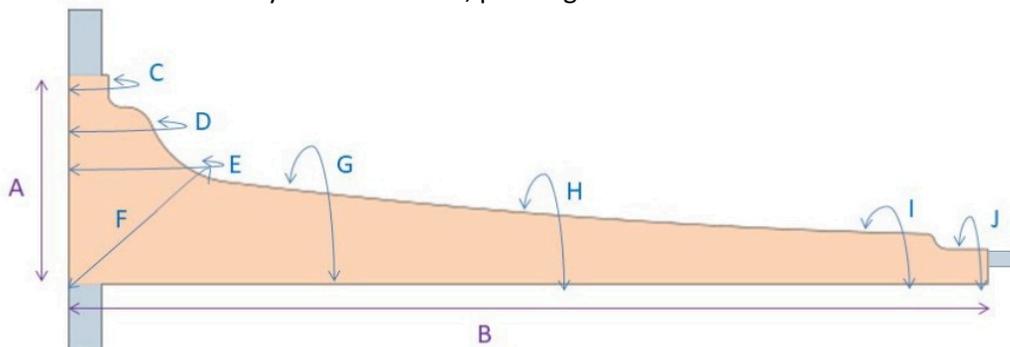

## Lengths

A. Height of flaked sail at the mast measured from above the headboard to below the lowest flaked sail edge.	B. Length of cover from forward centerline of mast to immediately aft of sail clew, ensuring enough cover length to protect the clew. Measure around mast mounted winches if present.
--	---

## Circumferences

C. Mast including halyards, spinnaker pole tracks, etc that will be inside the cover immediately above where the flaked sail head rests.	D. Mast including halyards, spinnaker pole tracks, winches, etc PLUS the sail headboard.
E. Mast and flaked sail at half of "A" height including mast mounted winches.	F. Mast and flaked sail at 45° angle including mast mounted winches.
G. Circumference of flaked sail at quarter of "B" measurement.	H. Circumference of flaked sail at half "B" measurement.
I. Circumference of flaked sail at clew.	J. Circumference of boom including control lines and tracks immediately aft of sail clew.

Please email either a scanned copy of this completed form or a list of measurements "A" through "J" and any other information to [accounts@sailmakers.co.nz](mailto:accounts@sailmakers.co.nz)